

DS-QAE0330G1T-V
30W Analog Horn Speaker



- High sensitivity and high sound, long transmission distance
- Multiple power levels are optional
- IP65


▪ **Specification**

Model		DS-QAE0330G1T-V
Speaker	Rated Power	70V: 2.5W/5W/7.5W/15W/30W; 100V: 5W/10W/15W/30W
	Sensitivity(1 m, 1 W)	108dB±3dB
	Max. Acoustic Pressure	120 dBSPL
	Frequency Response	250 Hz-8 kHz
	Speaker Unit	34-core 2-inch mid-to-high (dome resin film)
General	Material	ABS
	Operating Temperature	-20 °C to 55 °C
	Operating Humidity	<90% (No condensation)
	Dimension	240mm × 220 mm × 165 mm
	Weight	Approx. 1.48 kg
	Color	White
	With Package Weight	Approx. 2.05 kg
	Packing List	Instructions × 1 Regulatory Compliance and Safety Information × 1
Approval	Protection	IP65

▪ **Available Model**

DS-QAE0330G1T-V

▪ **Dimension**

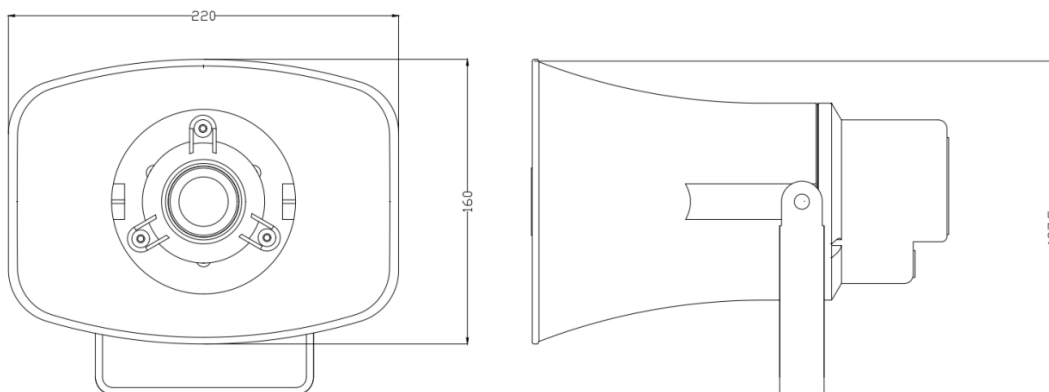

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

