

DS-2CE16D7T-IT5 HD 1080p WDR EXIR Bullet Camera



Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080p resolution
- 3.6 mm, 6 mm, 8 mm, 12 mm, 16 mm fixed focal lens True

Day/Night

- OSD menu, DNR, Smart IR
- True WDR, up to 120 dB
- EXIR technology, up to 80 m IR distance
- IP66
- Up the Coax (HIKVISION-C)




Specifications

Camera	
Image Sensor	2 MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1928 (H) × 1088 (V)
Min. illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 s (1/30 s) to 1/50,000 s
Lens	3.6 mm, 6 mm, 8 mm, 12 mm, 16 mm lens
Horizontal Field of View	82.2° (3.6 mm), 54° (6 mm), 37.7° (8 mm), 24.8° (12 mm), 19.2° (16 mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360°
Synchronization	Internal synchronization
WDR	> 120 dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 HD analog output
S/N Ratio	> 62 dB
Menu	
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/MWB
BLC	Support
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 15%
Power Consumption	Max. 5 W
Protection Level	IP66
IR Range	Up to 80 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	86.7 mm × 81.6 mm × 226 mm (3.41" × 3.23" × 8.67")
Weight	Approx. 680 g (1.5 lb.)

Order Models

DS-2CE16D7T-IT5

Dimensions

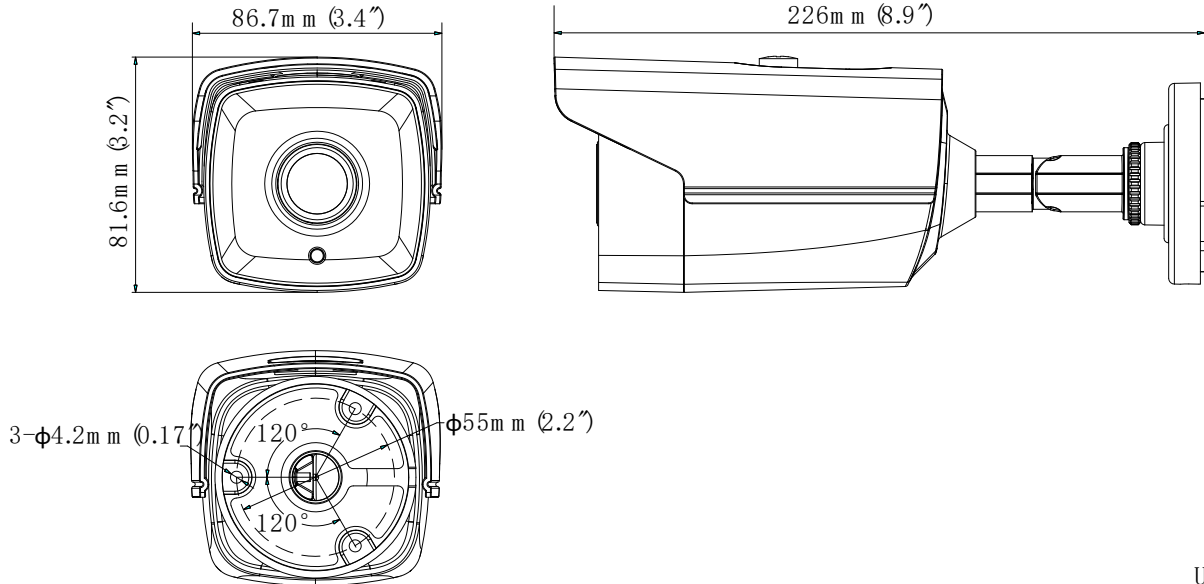

Unit: m m

Accessories



DS-1280ZJ-XS
Junction Box



DS-1H18
Video Balun



X41T
Camera Tester

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com